

LEGEND, SYMBOLS & BORDER

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

(1) 6" STANDARD, HORIZONTALLY ALIGN RIGHT EXTREME EDGE OF WHOLE NUMERALS, REGARDLESS OF LINE OF COPY.

HORIZONTALLY ALIGN RIGHT EXTREME EDGE OF FRACTIONS REGARDLESS OF LINE COPY.

WHEN NO FRACTIONS EXIST, RIGHT EXTREME EDGE OF WHOLE NUMERALS SHALL BE 13" FROM EDGE OF SIGN.

(2) UPPER CASE LETTER HEIGHT FROM LONGEST DESTINATION TO LONGEST DISTANCE.

INCREASE THIS SPACE TO PROVIDE EVEN 12" WIDTH FOR ENTIRE SIGN.

GENERAL NOTES (ALL SIGNS):

GROUND MOUNTED SIGNS GREATER THAN 6 FEET WIDE OR SIGNS GREATER THAN 30 SQUARE FEET SHALL BE STRUCTURAL.

GUIDE SIGN WIDTH VARIABLE IN 12" INCREMENTS.

GUIDE SIGN HEIGHT VARIABLE IN 12" INCREMENTS.

STATE ABBREVIATIONS SHALL BE THE STANDARD 2-LETTER POSTAL ABBREVIATION, AND SHALL BE DETAILED IN ALL-CAPS.

SEE OTHER STANDARD DRAWINGS FOR ARROW DETAILS.

NOTES:

"ROUTE" SHALL NOT BE ABBREVIATED.

INTERSTATES SHALL BE REFERENCED WITH A CAPITAL "I". (EX. ROUTE I-29).

Y = UPPER CASE LETTER HEIGHT.

USE HYPHEN TO JOIN 2 ROUTES SHARING THE SAME ROADWAY.


USE AN AMPERSAND TO SEPERATE 2 ROUTES ON INDIVIDUAL ROADWAYS.


USE COMMAS AND AN AMPERSAND TO SEPERATE 3 OR MORE ROUTES ON INDIVIDUAL ROADWAYS.


BORDER (ALL SIGNS)					
CORNER RADII	CORNER RADII WIDTH				
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES		
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1		
7 ′	9				
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2		

GENERAL SIGN DATA					
STR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES	
BACKGROUND		R2	GREEN		
LEGEND	L-3	R4	WHITE	E(M)	
SYMBOLS	L-3	R4	VAR.		
BORDER	L-3	R4	WHITE		
SUBSTRATE	STRUCT	JRAL			

MIS	SOURI HIGHWAYS AND T COMMISSION		
	STRUCT	Y SIGNING URAL SIGNS NGE SEQUENCE	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	1/18

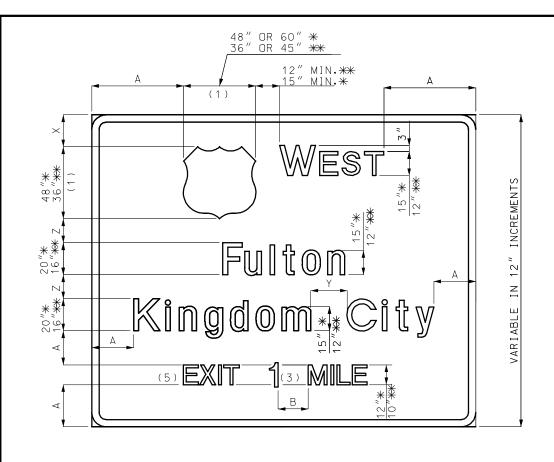

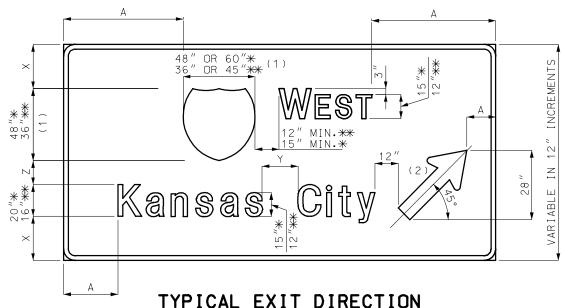



CROSSROAD GUIDE

TYPICAL ADVANCE GUIDE

NOTES:

CARDINAL DIRECTION PLACED ON EXIT SIDE OF SHIELD.

- (1) ALTERNATE ROUTE SHIELDS MAY BE USED AS REQUIRED.
- (2) TYPE A ARROW AT 45° STANDARD REGARDLESS OF ROADWAY GEOMETRICS.
- (3) WHOLE NUMERALS, 18" GROUND MOUNT, 15" OVERHEAD.
- (4) LENGTH OF ARROW IS EQUAL TO 50% OF LEGEND LENGTH WITH MAXIMUM OF 48" IN 12" INCREMENTS.
- (5) IF EXIT NUMBER PANELS ARE USED WITH THE ADVANCE GUIDE SIGN, "EXIT" WILL NOT BE REQUIRED.

LEGEND, SYMBOLS & BORDER

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

BORDER (ALL SIGNS)					
CORNER RADII	CORNER RADII WIDTH				
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES		
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1		
7′	9				
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2		

GENERAL SIGN DATA					
STR2L-3	TYPE	REFL. SHEE GROUND	OVERHEAD	COLOR	LETTER SERIES
BACKGROUND	L-3	R2	R2	GREEN	
LEGEND	L-3	R4	R4	WHITE	E(M)
SYMBOLS	L-3	R4	R4	VAR.	
BORDER	L-3	R4	R4	WHITE	
SUBSTRATE	STRUCTL	JRAL (SEE (GEN. NOTES	ON SH.	1)

GUIDE SIGN LEGEND

A = VARIABLE SO THAT THE OVERALL SIGN WIDTH IS IN 12" INCREMENTS MINIMUM LOWER CASE HEIGHT.

B = 1.5 TIMES WORDING LETTER HEIGHT.

X = APPROXIMATELY THE UPPERCASE LETTER HEIGHT. VARY THIS DIMENSION FOR HEIGHT AND WIDTH INCREMENTAL ROUNDING.

Y = UPPER CASE LETTER HEIGHT

Z = LOWER CASE LETTER HEIGHT

= GROUND MOUNT

= OVERHEAD


NOTES:


NUMERAL TO FRACTION SPACE, 8" GROUND MOUNT, 6" OVERHEAD.

HORIZONTALLY CENTER ALL LINES OF TEXT AND SYMBOLS.

BOX DIMENSION FRACTIONS: OVERHEAD IS 15" H \times 20"W FOR 1/2, 1/4, 15"H \times 25"W FOR 3/4, GROUND MOUNT 18"H \times 24"W FOR 1/2, 1/4, 18"H \times 30"W FOR 3/4.

MISS	SOURI HIGHWAYS AND T		
		Y SIGNING URAL SIGNS DIRECTION S	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	2 / 18

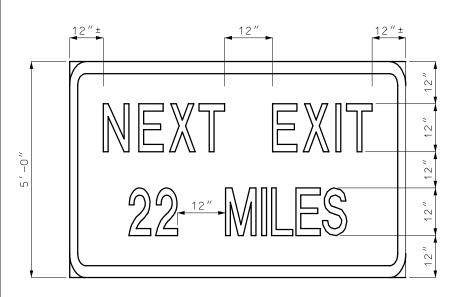





E2-1
NEXT EXIT SUPPLEMENTAL
ADVANCE GUIDE

E2-1A

COUNTY LINE





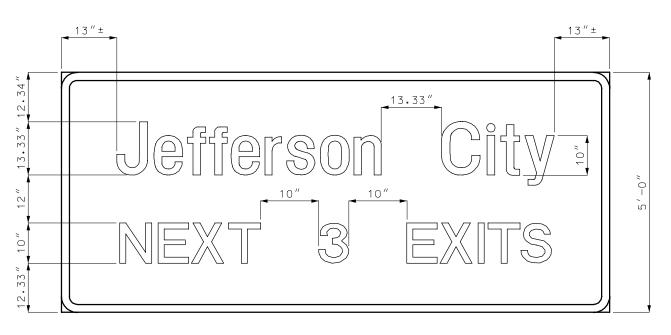

NEXT (X) EXITS

BORDER (ALL SIGNS)						
CORNER RADII	CORNER RADII					
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES			
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1			
7 ′	9					
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2			

LEGEND, SYMBOLS & BORDER


L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)


GENERAL SIGN DATA					
STR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES	
BACKGROUND		R2	GREEN		
LEGEND	L-3	R4	WHITE	E(M)	
SYMBOLS	L-3	R4	VAR.		
BORDER	L-3	R4	WHITE		
SUBSTRATE	STRUÇT	URAL (SEE GEN.	NOTES	ON SH. 1)	

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION				
	STRUCTO MISC. FREEWA	AY SIGNING URAL SIGNS Y AND EXPRESSWAY DE SIGNS		
DATE:	EFFECTIVE: 07-01-2004	903.02AG 3/18		

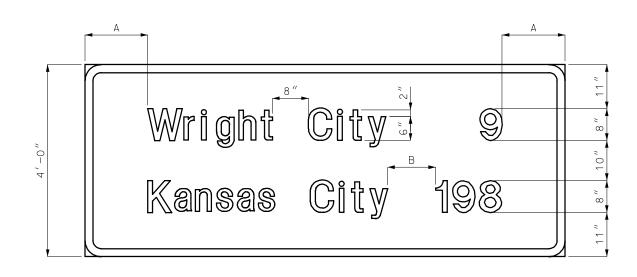

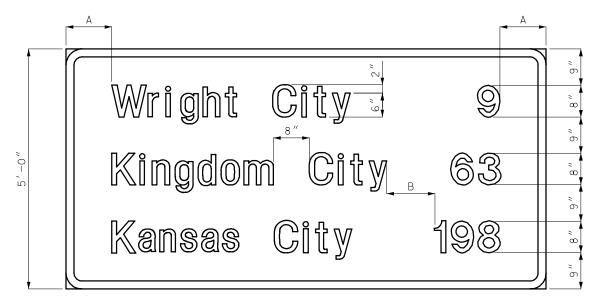


NOTE: FOR INTERSTATE, LAST LINE OF COPY SHALL INDICATE APPROVED AASHTO CONTROL CITY.

POST INTERCHANGE/INTERSECTION DISTANCE

BACKGROUND REFLECTIVE SHEETING

- A = VARIABLE SO THAT THE OVERALL SIGN WIDTH IS IN 12" INCREMENTS, MINIMUM LOWER CASE HEIGHT.
- B = UPPER CASE LETTER HEIGHT, FROM LONGEST DESTINATION TO LONGEST DISTANCE, REGARDLESS OF LINE COPY.




GENERAL SIGN DATA REFLECTIVE SHEETING TYPE COLOR LETTER SERIES STR2L-3 GREEN BACKGROUND EGEND L-3R4 WHITE E(M) SYMBOLS L-3R4 VAR. BORDER L-3R4 WHITE SUBSTRATE STRUCTURAL (SEE GEN. NOTES ON SH. 1

LEGEND, SYMBOLS & BORDER

CITY LIMITS

A 20.63" 6" 23.88" A

CITY LIMITS

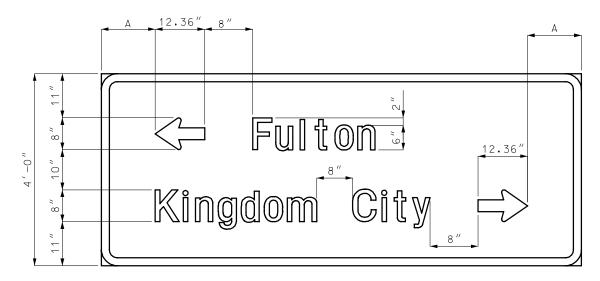

NOTE: DESTINATIONS ARE PLACED IN THE FOLLOWING ORDER: AHEAD, LEFT, RIGHT, TYPE D ARROWS SHALL BE USED.

ADVANCE INTERSECTION DESTINATION

HIGHWAY SIGNING STRUCTURAL SIGNS MISC. GOUND MOUNTED FREEWAY AND EXPRESSWAY GUIDE SIGNS


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)


R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

DATE: _____ | EFFECTIVE: 07-01-2004 | 903.02AG

2AG / 1

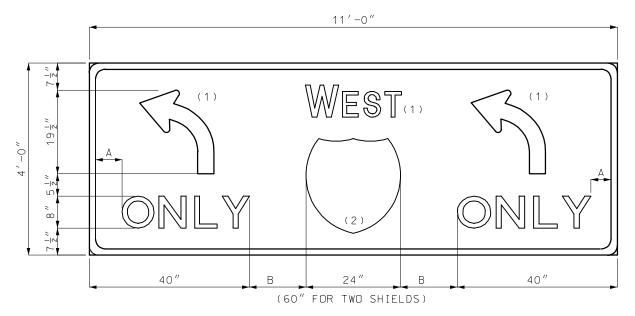



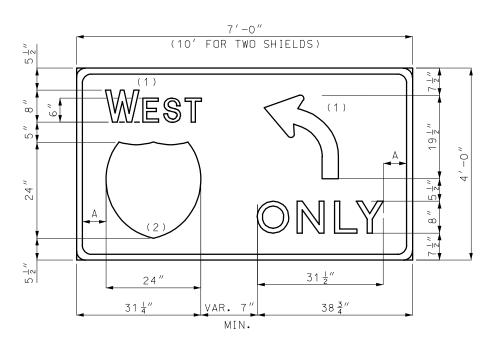

A = VARIABLE SO THAT THE OVERALL SIGN WIDTH IS IN 12" INCREMENTS , MINIMUM 6".

B = VARIABLE, MINIMUM 7".

BORDER (ALL SIGNS)					
CORNER RADII WIDTH					
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES		
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1		
7 ′	9				
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2		

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

NOTES:

SHEILD SHALL APPEAR ON THE EXIT SIDE OF SIGN.

SIGN ALWAYS PLACED OVERHEAD. MOUNT ON BRIDGE WHEREVER POSSIBLE.


- (1) ALL CARDINAL DIRECTIONS AND ARROWS HORIZONTALLY CENTERED IN SPACE PROVIDED.
- (2) ALTERNATE ROUTE SHIELDS MAY BE PROVIDED. USE STANDARD 24" OR 30" SHIELD IN SPACE PROVIDED.


GEN	IERAL	SIGN DATA		
STR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES
BACKGROUND		R2	GREEN	
LEGEND	L-3	R4	WHITE	E(M)
SYMBOLS	L-3	R4	VAR.	
BORDER	L-3	R4	WHITE	
SUBSTRATE	STRU	CTURAL		

LEGEND, SYMBOLS & BORDER

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

MIS	SOURI HIGHWAYS AND COMMISSION		
	STRUCTI LANE	Y SIGNING JRAL SIGNS CONTROL DUTE SHIELD	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	5 18

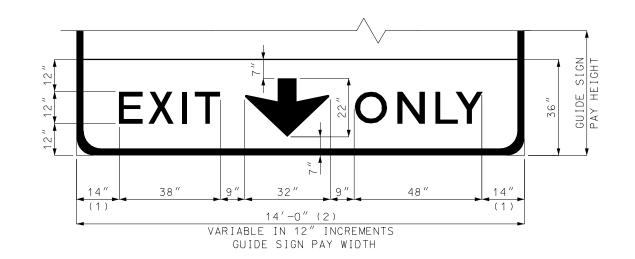

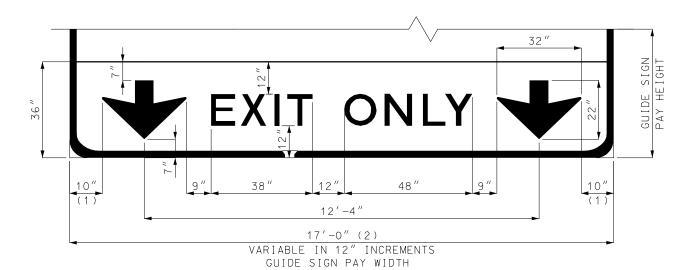

- (1) TYPICALLY VARY THIS DISTANCE TO MATCH WIDTH OF GUIDE SIGN.
- (2) MINIMUM GUIDE SIGN WIDTH WHEN EXIT ONLY PANEL IS CONTROL LINE FOR SIGN WIDTH.

BORDER (ALL SIGNS)				
CORNER RADII	WIDTH			
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES	
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1	
7′	9			
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2	

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

GENERAL SIGN DATA						
STR2L -3	TVDE	REFLECTIVE SHEETING TYPE	COL OR	LETTER SERIES		
	TIPE	SHEETING TIPE	CULUR	2FK1F2		
BACKGROUND		R2	YELLOW			
LEGEND	L-3		BLACK	E (MDD)		
SYMBOLS	L-3		BLACK			
BORDER	L-3		BLACK			
SUBSTRATE	STRU	CTURAL				

LEGEND, SYMBOLS & BORDER

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

GUIDE SIGN PAY HEIGHT

38"

(1)

48 "

11'-0" (2)

VARIABLE IN 12" INCREMENTS
GUIDE SIGN PAY WIDTH

(1)

GENERAL NOTES:


NO DIRECT PAY MADE FOR THIS PANEL. COST FOR PANEL IS INCLUDED IN THE COST FOR THE GUIDE SIGN TO WHICH THIS PANEL IS ATTACHED.


FOR OVERHEAD USE ONLY.

PLACE SIGN ON TRUSS TO ALIGN CENTER OF LANE WITH TYPE C ARROW.

MIS	SOURI HIGHWAYS AND T COMMISSION		
	STRUCTU	Y SIGNING JRAL SIGNS NLY PANELS	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	6 18



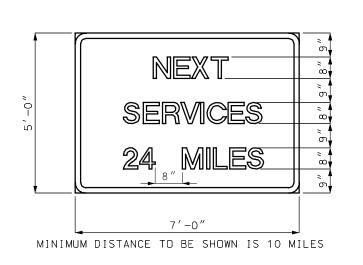

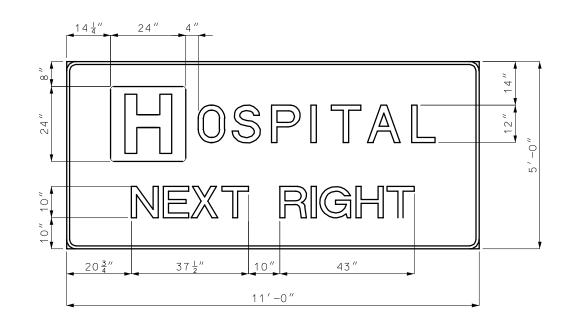

NOTE; FOR THE LETTER "H" USE THE D9-2 SIGNFACE AS A DEMOUNTABLE SHIELD.

	12"	24"	12″	24"	12"	24"	12"	
,,0-,,		30"	24"		24"		30"	24" 24" 8"
			×	T <u>12"</u> R				* 8 * 8
	20	<u>5</u> "		78 ½" 10′-0"		•		

INTERSTATE - USE "EXIT XX"
FREEWAY - USE "NEXT RIGHT" "SECOND RIGHT"

(1) TO BE USED IN CONFORMANCE WITH MANUAL ON UNIFORM TRAFFIC CONTROL.

NOTE: HORIZONTALLY CENTER ALL LINES OF TEXT AND SYMBOLS.

BORDER (ALL SIGNS)						
CORNER RADII	WIDTH					
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES			
LESS THAN DR EQUAL TO 6'	6	LESS THAN 12"	1			
7 ′	9					
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2			

BACKGROUND REFLECTIVE SHEETING


R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

GENERAL SIGN DATA						
STR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES		
BACKGROUND		R2	BLUE			
LEGEND	L-3	R4	WHITE	E(M)		
SYMBOLS	L-3	R4	WHITE			
BORDER	L-3	R4	WHITE			
SUBSTRATE	STRU	CTURAL				


LEGEND, SYMBOLS & BORDER

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION				
HIGHWAY SIGNING STRUCTURAL SIGNS SERVICE SIGNS				
DATE:	EFFECTIVE: 07-01-2004	903.02AG	7/18	




10 THRU 19 WITH LETTER



3 DIGIT WITH A 1 NUMERAL



3 DIGIT NUMERALS OR 20 THRU 99 WITH LETTERS




3 DIGIT NUMERALS WITH LETTER OR 3 DIGIT WITH A 1 NUMERAL & A LETTER

LEGEND,


L-3 DIRE MATE

SYMBOLS & BORDER	SIGN HEIGHT I		LETTER SIZE	INCHES
ECT APPLIED (CUT FROM				
ERIAL SHOWN ON PLANS.)	LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1
	7 ′	9		
DEEL FOTING CHEETING	GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2
REFLECTIVE SHEETING				


CORNER RADII



12 THRU 99 OR 1 THRU 9 WITH LETTER



1 THRU 11



9'-0" WITH NUMBER 1 NUMERAL 11'-0" WITH A LETTER 10'- 0" WITH A NUMBER 1


NUMERAL & A LETTER 12'- 0" FOR "EXITS" WITH A NUMBER 1 NUMERAL &

13'- 0" FOR "EXITS" WITH DOUBLE NUMERAL & A-B LETTERS

20 THRU 99


BORDER (ALL SIGNS)

WIDTH




(1) 9'- 0" 2 THRU 9 WITH A LETTER 11'- 0" FOR "EXITS" 2 THRU 9 WITH A-B LETTERS

1 THRU 9

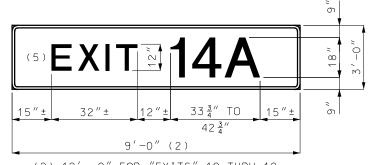

(2) 12'- 0" FOR "EXITS" 10 THRU 19 NUMERAL WITH A-B LETTERS

10 THRU 19 NUMERAL WITH LETTER



(4) 10'- 0" WITH NUMBER 1 NUMERAL
12'- 0" WITH A LETTER
12'- 0" WITH A NUMBER 1 NUMERAL & A LETTER
13'- 0" FOR "EXITS" WITH A TRIPLE NUMERAL
WITH A NUMBER 1 NUMERAL & A-B LETTERS
14'- 0" FOR "EXITS" WITH A TRIPLE
NUMERAL & A-B LETTERS

100 & OVER

	GEN	ERAL SI	GN DATA		
		REFL. SHE	EETING TYPE		LETTER
STR2L-3	TYPE	GROUND	OVERHEAD	COLOR	SERIES
BACKGROUND		R2	R2	GREEN	
LEGEND	L-3	R4	R4	WHITE	E(M)
SYMBOLS	L-3	R4	R4	VAR.	
BORDER	L-3	R4	R4	WHITE	
SUBSTRATE	STRU	CTURAL			

GENERAL NOTES:


FOR MOUNTING DETAILS SEE OTHER DRAWINGS.


PANEL SHALL BE MOUNTED DIRECTLY TO THE TOP OF THE GUIDE SIGN AND ALIGNED WITH THE EXIT SIDE.


	SOURI HIGHWAYS AND COMMISSION	TRANSPORTATION	
	HIGHWA	Y SIGNING MBER PANELS	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	8 18


BACKGROUND R


R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

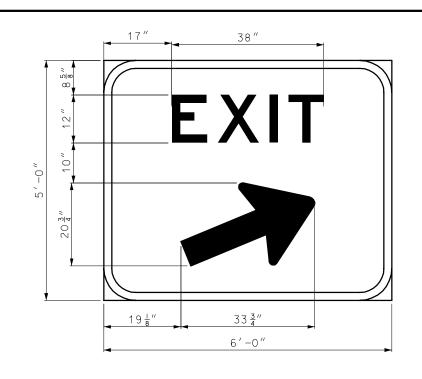

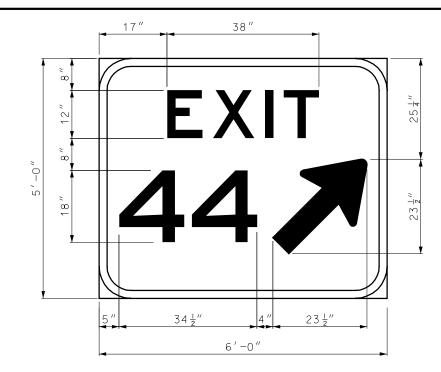

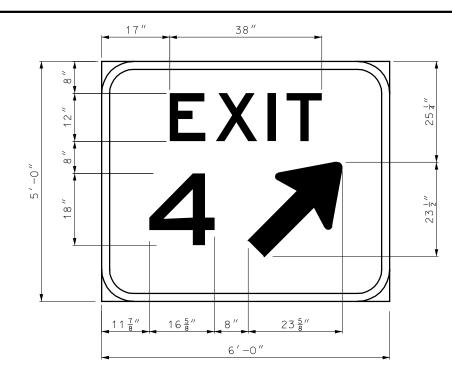

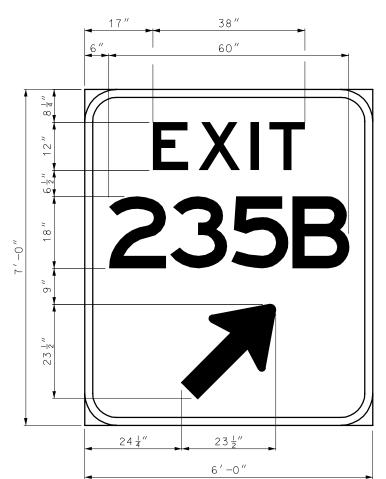

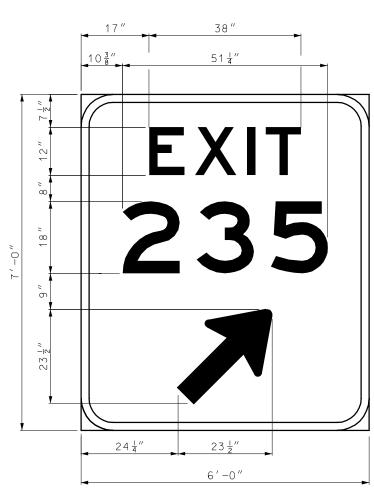

BORDER (ALL SIGNS)					
CORNER RADII WIDTH					
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES		
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1		
7 ′	9				
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2		

GENERAL SIGN DATA						
		REFL. SHE	EETING TYPE		LETTER	
STR2L-3	TYPE	GROUND	OVERHEAD	COLOR	SERIES	
BACKGROUND		R2	R2	GREEN		
LEGEND	L-3	R4	R4	WHITE	E(M)	
SYMBOLS	L-3	R4	R4	VAR.		
BORDER	L-3	R4	R4	WHITE		
SUBSTRATE	STRIIC	THRAI				

SUBSTRATE

ST STRUCTURAL SH SHEET

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

GENERAL NOTE:


FOR MOUNTING DETAILS, SEE DTHER DRAWINGS.


HIGHWAY SIGNING GORE EXIT SIGN DATE: EFFECTIVE: 07-01-2004 903.02AG					
	HIGHWAY SIGNING GORE EXIT SIGN				
)	DATE:	EFFECTIVE: 07-01-2004	903.02AG		


LEGEND, SYMBOLS & BORDER


L-1 SCREEN PRINT, REVERSE SCREEN PRINT, OR OPAQUE OR TRANSLUCENT CUTABLE FILMS AS APPROVED BY ENGINEER BASED SIGN COLOR COMBINATION.

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

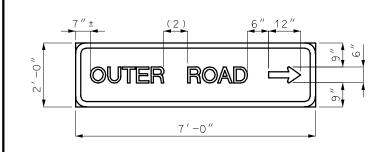





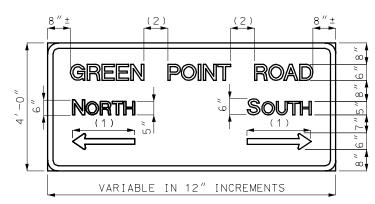

- (1) ROUND ARROW LENGTH TO NEAREST 1" INCREMENT.
- (2) 1 TO 1.5 TIMES LETTER HEIGHT.


SUBSTRATE


ST STRUCTURAL


SH SHEET


BACKGROUND REFLECTIVE SHEETING


R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

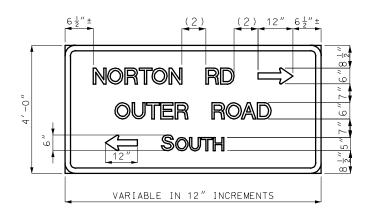









GE	GENERAL SIGN DATA							
SHR2L-3 STR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES				
BACKGROUND		R2	GREEN					
LEGEND	L-3	R4	WHITE	D				
SYMBOLS	L-3	R4	WHITE					
BORDER	L-3	R4	WHITE					
SUBSTRATE	SHEE	T (SEE GENERAL	NOTES)				

LEGEND, SYMBOLS & BORDER

- L-1 SCREEN PRINT, REVERSE SCREEN PRINT, OR OPAQUE OR TRANSLUCENT CUTABLE FILMS AS APPROVED BY ENGINEER BASED SIGN COLOR COMBINATION.
- L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)





MAST ARM STREETNAME SIGNS

BORDER (ALL SIGNS)						
CORNER RADII		WIDTH				
SIGN HEIGHT	INCHES	LETTER SIZE	INCHES			
LESS THAN OR EQUAL TO 6'	6	LESS THAN 12"	1			
7′	9					
GREATER THAN OR EQUAL TO 8'	12	12" OR LARGER	2			

GENERAL NOTES:

SIGNS GREATER THAN $6^{\,\prime}$ WIDE OR 30 SQ, FT. IN AREA SHALL BE STRUCTURAL.

MAST ARM STREETNAME SIGNS SHALL BE FLAT SHEET.


FLAT SHEET FOR SIGNS SHALL BE THE FOLLOWING THICKNESS:

9 SQUARE FEET OR LESS - .080 IN.,


OVER 9 SQUARE FEE+ BUT LESS THAN 16 SQUARE FEET - .100 IN.,

16 SQUARE FEET OR LARGER - .125 IN.

FOR MOUNTING DETAILS, SEE OTHER DRAWINGS.

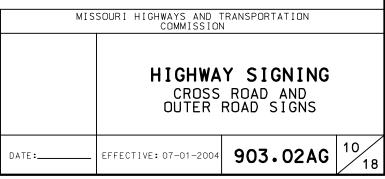

CROSS ROAD AND OUTER ROAD SIGNS

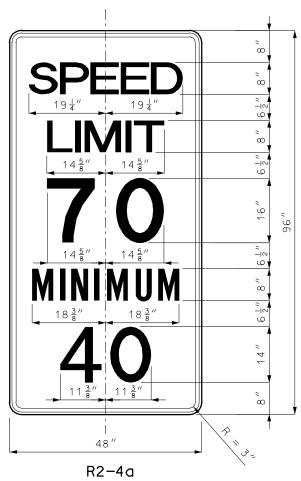

		-	
FOR	USE	ON	
INTERS	TATE	ONL	. Y

GE1	IERA	L SIGN DA	TA; R2	-4a
SHR2L-1	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES
BACKGROUND		R2	WHITE	
LEGEND	L-1		BLACK	С
SYMBOLS	L-1		BLACK	
BORDER	L-1		BLACK	
SUBSTRATE	SHEE.	Γ		


LEGEND, SYMBOLS & BORDER

L-1 SCREEN PRINT, REVERSE SCREEN PRINT, OR OPAQUE OR TRAN-SLUCENT CUTABLE FILMS AS APPROVED BY ENGINEER BASED ON SIGN COLOR COMBINATION.

L-3 DIRECT APPLIED (CUT FROM MATERIAL SHOWN ON PLANS.)

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3

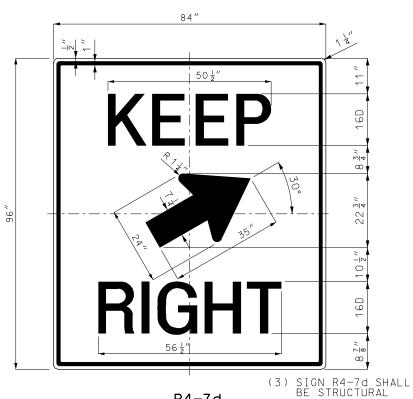

R4-7d

KEEP RIGHT (WITH 30° ARROW) FREEWAY/EXPWY.

GEN	-7b			
SHR2L-3	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES
BACKGROUND		R2	WHITE	
LEGEND	L-3		BLACK	D
SYMBOLS	L-3		BLACK	
BORDER	L-3		BLACK	
SUBSTRATE	STRU	CTURE		

GENERAL NOTES:

FLAT SHEET FOR SIGNS SHALL BE THE FOLLOWING THICKNESS (EXCEPT FOR 36" STOP SIGN THAT USES AN .100 ALUMINUM PLATE):


9 SQUARE FEET DR LESS - .080 IN.,

OVER 9 SQUARE FEET TO 16 SQUARE FEET - .100 IN.,

16 SQUARE FEET OR LARGER - .125 IN.

FOR MOUNTING DETAILS, SEE OTHER DRAWINGS.

MIS	MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION					
		AY SIGNI TORY SIGNS				
DATE:	EFFECTIVE: 07-01-2004	903.02	AG 11/18			

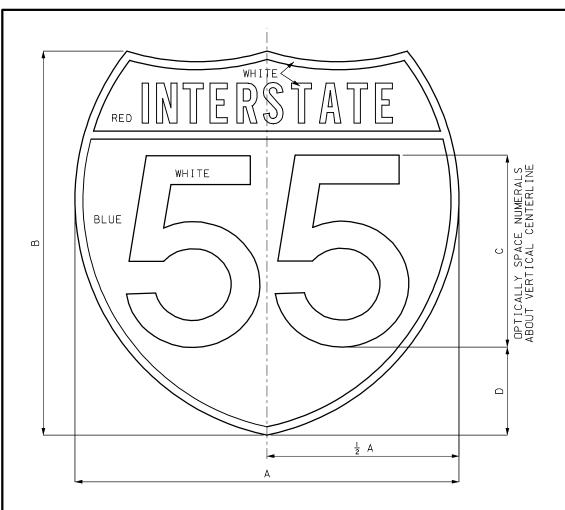



FOR GUIDE SIGN USE

LOCATION	SIGN	DIME	NS I ONS	S (INC	NCHES)			
LUCATION	SIGN	А	В	С	D			
CROSSROAD	1,2-DIGITS	24	24	12D	5 ½			
OVERHEAD	1,2-DIGITS	36	36	18D	8 1/4			
GROUND MOUNT	1,2-DIGITS	48	48	24D	11			
CROSSROAD	3-DIGITS	30	24	12D	5 			
OVERHEAD	3-DIGITS	45	36	18D	8 			
GROUND MOUNT	3-DIGITS	60	48	24D	11			

DIMENSIONS FOR GUIDE SIGN, BUSINESS LOOP OR SPUR SHIELDS

	GUIDE SIGN						
G	GENERAL SIGN DATA						
	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES			
BACKGROUND	L-1	R4	VAR.				
LEGEND	L-1 *		WHITE	VAR **			
SYMBOLS							
BORDER	L-1 *		WHITE				
SUBSTRATE							

* REVERSE SCREEN PROCESS.
** SEE DIMENSION TABLES THIS DRAWING.

INTERSTATE SHIELD

SIGN	DΙ	MENSI	ONS (INCHE	S)
31610	А	В	С	D	E
1 & 2 DIGITS	24	24	1 ½ D	1 3/8	1 O D
3 DIGITS	30	24	1 ½ D	2 	10D

DIMENSIONS FOR INDEPENDENT USE SHIELD

INDEPENDENT						
	GENERA	L SIGN DAT	Α			
SHR2L-1	TYPE	REFLECTIVE SHEETING TYPE	COLOR	LETTER SERIES		
BACKGROUND	L-1	R2	VAR.			
LEGEND	L-1 *		WHITE	VAR **		
SYMBOLS						
BORDER	L-1 *		WHITE			
SUBSTRATE	SHEET					

* REVERSE SCREEN PROCESS.

** SEE DIMENSION TABLES THIS DRAWING.

SUBSTRATE

LEGEND, SYMBOLS & BORDER

ST STRUCTURAL SH SHEET

L-1 SCREEN PRINT, REVERSE SCREEN PRINT, OR OPAQUE OR TRAN-SLUCENT CUTABLE FILMS AS

APPROVED BY ENGINEER BASED ON SIGN COLOR COMBINATION.

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

GENERAL NOTES:

ALL SHIELDS FOR GUIDE SIGN USE SHALL BE SCREEN PROCESS OR ELECTRONIC CUTABLE FILM ON TYPE 7 REFLECTIVE SHEFTING

FOR HOLE PUNCHING AND MOUNTING DETAILS SEE OTHER DRAWINGS.

OCCASSIONALLY THE NUMERALS CANNOT BE ACCOMODATED WITHIN THE SPACE AVAILABLE ON THE STANDARD SHIELD. FOR THESE SITUATIONS, THE STANDARD SERIES D NUMERAL MAY BE REDUCED TO SERIES C, OR HORIZONTALLY COMPRESSED BY MEANS OF SIGNING SOFTWARE AS DIRECTED BY THE FNGINER.

ALL SIGNS ON THIS SHEET ARE TO BE FABRICATED FROM .080 IN. SHEET ALUMINUM, UNLESS OTHERWISE SHOWN.


HIGHWAY SIGNING
SHIELD FOR INDEPENDENT
AND GUIDE SIGN USE


DATE:

EFFECTIVE: 07-01-2004

903.02AG

12
18

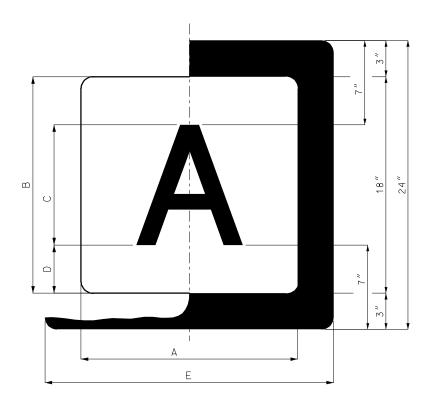

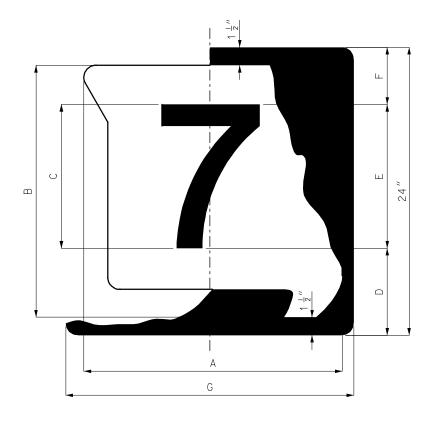

LOCATION	NO. OF		ENS I ONS GU I DE		
	LETTERS	А	В	С	D
CROSSROAD	1	24	24	12D	6
CROSSROAD	2	30	24	12D	6
OVERHEAD	1	30	30	18D	6
OVERHEAD	2	36	30	18D	6
GROUND MOUNT	1	42	42	24D	9
GROUND MOUNT	2	48	42	24D	9

NUMBER	DIMENSIONS (INCHES) FOR INDEPENDENT USE		
LETTERS	С	E	
1	12D	24	
2	12C	30	

SUPPLEMENTARY SHIELD

LOCATION	ROUTE NUMBER	DIMENSIONS (INCHES) FOR GUIDE SIGN USE		
	NOMBLIX	A B C		С
CROSSROAD	1 & 2 DIGITS	24	24	12D
OVERHEAD	1 & 2 DIGITS	36	36	18C
GROUND MOUNT	1 & 2 DIGITS	48	48	24D
CROSSROAD	3 DIGITS	30	24	12C
OVERHEAD	3 DIGITS	45	36	18D
GROUND MOUNT	3 DIGITS	60	48	24D

ROUTE	DIMENSIONS (INCHES) FOR INDEPENDENT USE			
NUMBER	D	E	F	G
1 & 2 DIGIT	7 1/4	12D	4 3 4	24
3 DIGIT	8 4	12 B OR C	5 3	30

STATE ROUTE SHIELD

GUIDE SIGN				
GENERAL SIGN DATA				
	COLOR	REFLECTIVE SHEETING TYPE	LETTER SERIES	
BACKGROUND	WHITE	R4		
LEGEND	BLACK		VAR *	
SYMBOLS	WHITE			
INDEPENDENT				
GENERAL SIGN DATA				
SHR2L-1	COLOR	REFLECTIVE SHEETING TYPE	LETTER SERIES	
BACKGROUND	WHITE	R2		

* SEE DIMENSION TABLES THIS DRAWING.

BLACK

WHITE

BLACK

SHEET

LEGEND, SYMBOLS & BORDER

L-1 SCREEN PRINT, REVERSE SCREEN PRINT, OR OPAQUE OR TRAN-SLUCENT CUTABLE FILMS AS APPROVED BY ENGINEER BASED ON SIGN COLOR COMBINATION.

VAR *

SUBSTRATE

LEGEND

BORDER

SYMBOLS

SUBSTRATE

ST STRUCTURAL SH SHEET

BACKGROUND REFLECTIVE SHEETING

R2 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 3 R4 REFER TO MISSOURI SPECIFICATION SECTION 1042 TYPE 7

GENERAL NOTES:

ALL SHIELDS FOR GUIDE SIGN USE SHALL BE SCREEN PROCESS OR CUTTABLE FILM ON TYPE 7 REFLECTIVE SHEETING.

ALL SHIELDS FOR INDEPENDENT SIGN USE SHALL BE SCREEN PROCESS OR CUTTABLE FILM ON TYPE 3 REFLECTIVE SHEETING.


FOR HOLE PUNCHING AND MOUNTING DETAILS SEE OTHER DRAWINGS.


LAYOUT OF MISSOURI SHIELDS ARE AVAILABLE UPON REQUEST.

OCCASIONALLY THE NUMERALS CANNOT BE ACCOMMODATED WITHIN THE SPACE AVAILABLE ON THE STANDARD SHIELD. FOR THESE SITUATIONS, THE STANDARD SERIES D NUMERAL MAY BE REDUCED TO SERIES C, DR HORIZONTALLY COMPRESSED BY MEANS OF SIGNING SOFTWARE AS DIRECTED BY THE ENGINEER.


ALL SIGNS ON THIS SHEET ARE TO BE FABRICATED FROM .080 IN. SHEET ALUMINUM, UNLESS OTHERWISE SHOWN.


MIS	SOURI HIGHWAYS AND COMMISSION		
	STANDARD INDEPENDI	Y SIGNING SHIELDS FOR ENT AND GUID GN USE	
DATE:	EFFECTIVE: 07-01-2004	903.02AG	13 18

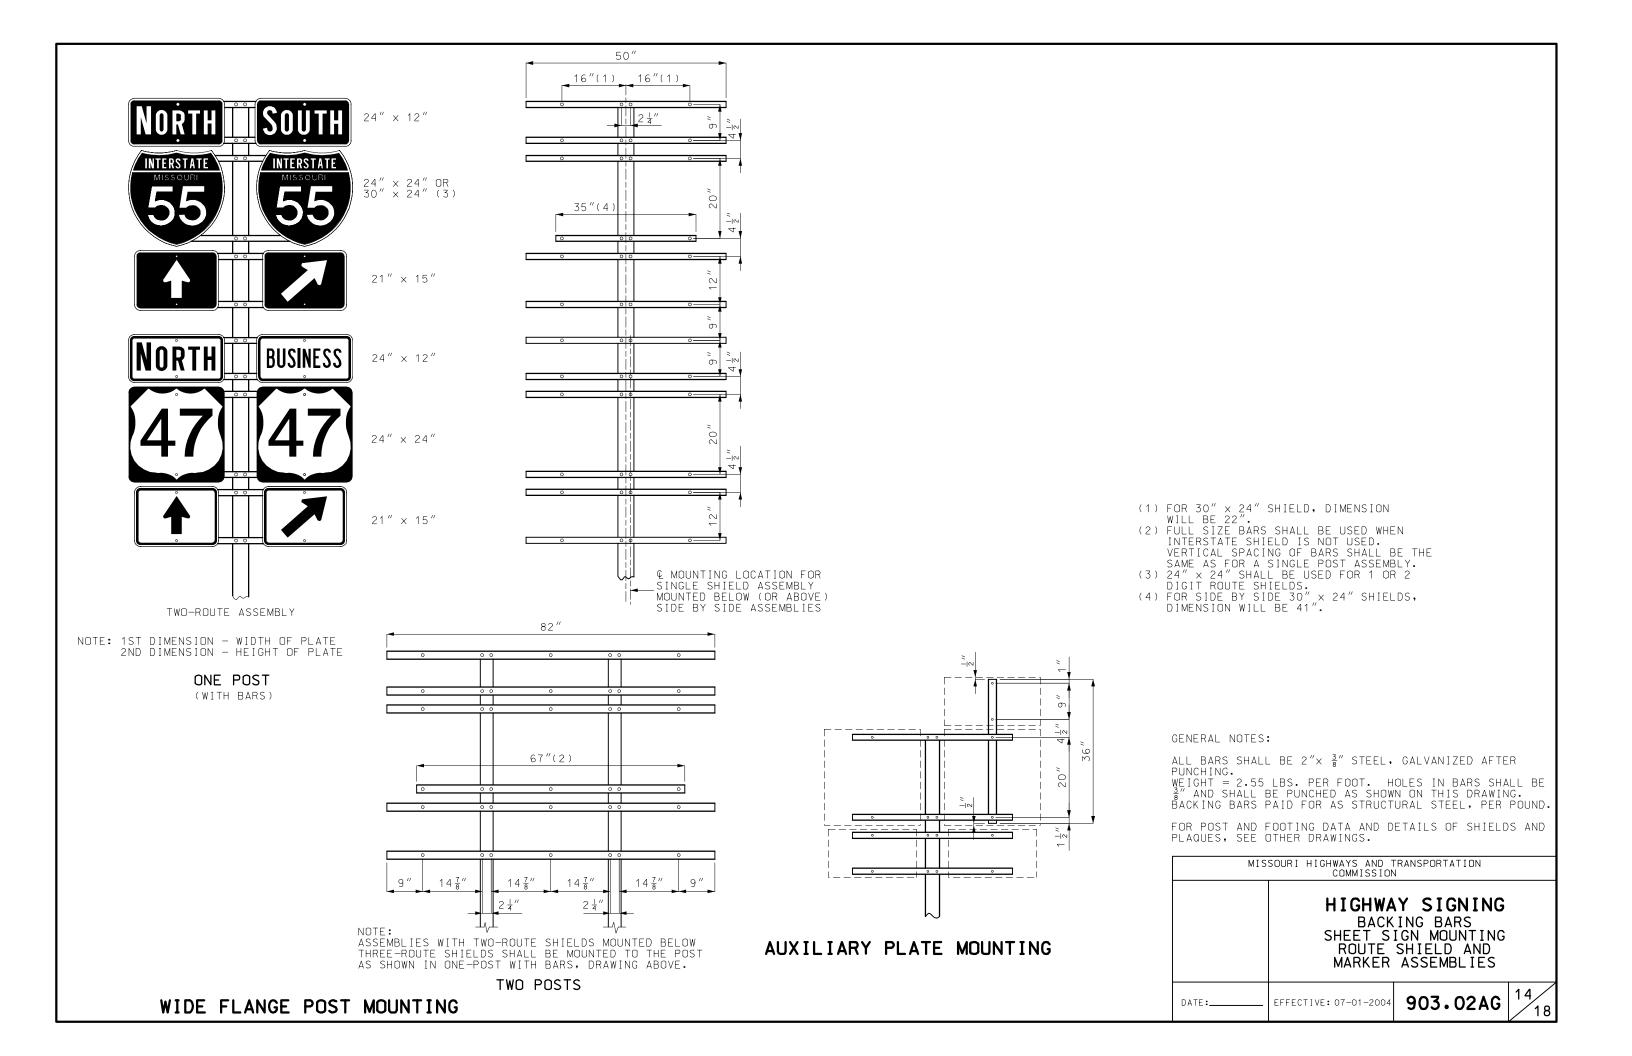



THE THREE BACKING BAR LAYOUTS FOR SINGLE POST SIGNS

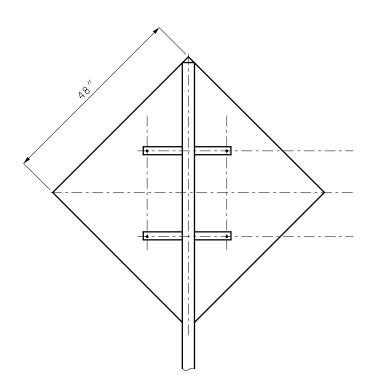

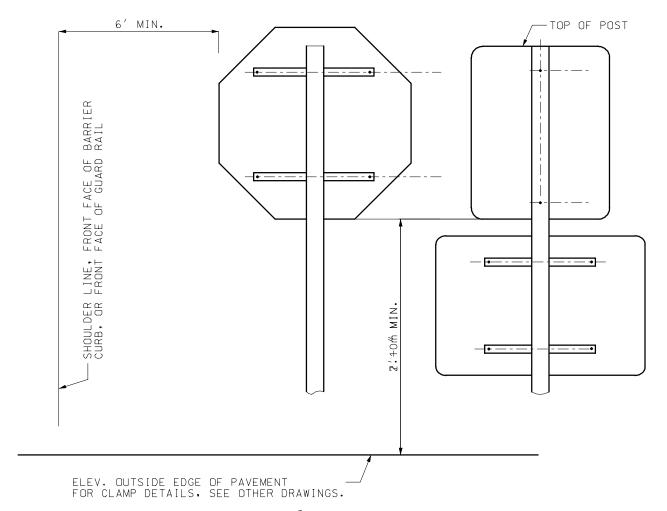

HOLES IN BACKING BARS SHALL BE $\frac{3}{8}{''}$ AND PUNCHED AS SHOWN ON THIS DRAWING.

HIGHWAY SIGNING
BACKING BARS DETAILS

DATE: ______ EFFECTIVE:07-01-2004 903.02AG 15

